


Product Datasheet

Item No.: 46690

PRODUCT NAME

Optiline LED floodlight 30 W with tripod - 3600 lm IP44

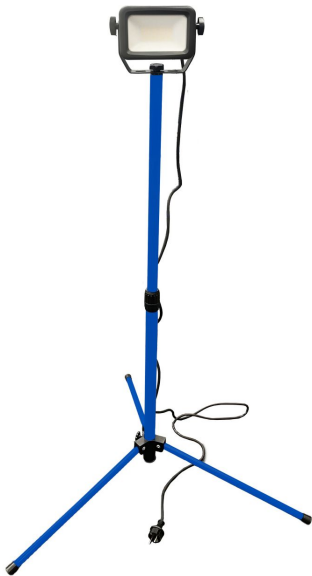

Reference image



- Power: 30 W, luminous flux 3600 lm (120 lm/W)
- Colour temperature: 4000 K (neutral white)
- Durable plastic and aluminium housing
- Foldable handle for easy portability
- Adjustable tripod height up to 1.2 m
- Protection rating IP44 – dust and splash resistant
- LED lifetime: over 40,000 hours

Technical data

EAN	4011160466908
Weight [kg]	2.05
Dimensions	15,5x16,3x5,3 cm
Main color	blue
Series	Optiline
Category	Lighting
Subcategory	Optiline floodlight series
Cable type	H07RN-F
Cross section [mm²]	3G1,0
Cable color	black
Cable length [m]	2
Rated voltage [V]	230
Rated current [A]	16
Power [W]	30
IP protection	IP44
Input	Shock-proof plug 230 V, 16 A, IP44 with 2 m H05RN-F 3G1.0
Light color [K]	4000
Luminous flux [lm]	3600
Beam angle	120

Your partner for professional lighting and electrical products.