


Product Datasheet

Item No.: 61831

PRODUCT NAME

A-V-E 1 55 kVA cabinet, CEE construction site power combination unit

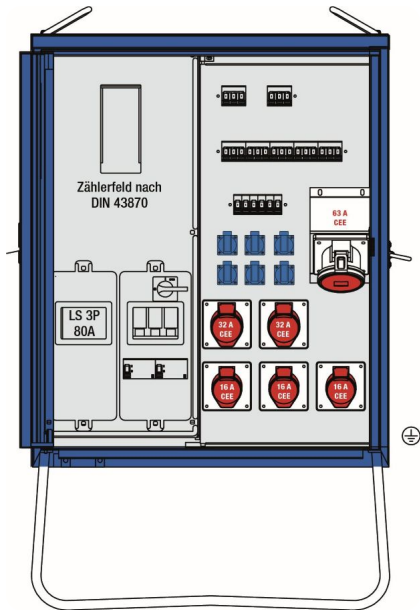

- Construction site power combination unit in a stable steel cabinet painted with a blue paint free from heavy metals
- Lockable single door with spring-loaded bolt for padlock and recessed grip
- With transport grips on the side, two lifting eyes at the top, strain relief rail, fastening straps for earth spikes and earthing screw
- DS meter board in accordance with DIN 43870/2 available: Meter not included with the delivery
- IP44: with closed door, IP21: with open door
- Cable insertion M63 with strain relief up to max. 50 mm²
- Connection protective device:
- 1× NH00 fuse switch with 100 A with U-clamp terminal 10-50mm²

Reference image

Technical data

EAN	4011160618314
Weight [kg]	65
Dimensions	36x129x80,3 cm
Main color	blue
Category	CEE 400 V product range
Subcategory	CEE construction site power combination unit cabinets
Rated voltage [V]	400
Rated current [A]	63
IP protection	IP44
Protection device	1x MCB 3P 80A with thermal-magnetic trigger 1x RCD 63 A, 4-pole, 300 mA, type B, all-current-sensitive 1x RCD 63 A, 4-pole, 30 mA, type B, all-current-sensitive 1x MCB D 50 A, 3-pole 1x MCB C 50 A, 3-pole 2x MCB C 32 A, 3-pole 3x MCB C 16 A, 3-pole 6x MCB C 16 A, 1-pole
Input	Cable insertion M63 with strain relief up to max. 50 mm ² Connection protective device: 1× NH00 fuse switch with 100 A with U-clamp terminal 10-50mm ²
Output	1x CEE socket 400 V, 63 A, 5-pole 2x CEE socket 400 V, 32 A, 5-pole 3x CEE socket 400 V, 16 A, 5-pole 6x shock-proof socket outlet 230 V, 16 A, IP44
Number of Type F sockets (230 V)	6
Number of CEE 400 V 16 A sockets	3
Number of CEE 400 V 32 A sockets	2
Number of CEE 400 V 63 A sockets	1

Your partner for professional lighting and electrical products.